



STAINLESS STEEL ELECTRONIC OVERHEAD TRACK SCALE



- **ALL STAINLESS STEEL**
- **2,000 LB CAPACITY**
- **THREE TRACK LENGTHS**
- **NO MOVING PARTS**



The Cardinal stainless steel overhead track scale is ideal for weighing products being transported by a conventional single overhead track and trolley system. It is ideal for weighing products being conveyed in many industries, such as storage warehouses, produce and meat packing plants, or any manufacturing process using this type of conveying system.

Our overhead track scale is available with your choice of three rail lengths - 24", 30" and 50" - making it easily adaptable to most any rail hanger spacing. Its rugged construction insures years of continuous, trouble-free use. Non-corrosive stainless steel material provides easy cleaning and washdown when desired.

Our "solid-mount" load cell assembly virtually eliminates all moving parts that may wear and need replacement under normal heavy use. Installation is as easy as it is to use. Simply cut your existing rail and mount the scale with four bolts. That easy - that quick.

Electronic track scale speeds up your operation

The Cardinal electronic overhead track scale is equipped with our 205 digital weight indicator, which provides quick, responsive weight readouts of the commodity rolled on the scale.

The Cardinal 205 digital weight indicator is furnished in a NEMA-4 stainless steel desk mount enclosure. Features include: .6" high LED display with push button tare, selectable weight units, bi-directional serial interface, gross, tare, and net conversions



205 Digital Weight Indicator with NEMA-4 Stainless Steel Enclosure

MODEL AB-4-LC SPECIFICATIONS

CAPACITY: 2,000 lb/1,200 kg

GRADUATIONS: .5 lb/.2 kg

CONSTRUCTION: Stainless steel

OPERATING TEMPERATURE:

32½F - 122½F, 0½C - 50½C



ENCLOSURE: Desk mount NEMA-4 stainless steel

ENCLOSURE: Desk mount NEMA-4 stainless steel

POWER: 115 VAC 60 Hz/230 VAC 50/60 Hz

DISPLAY: .6" high LED display with push button tare, gross, tare, and net conversions

RAIL LENGTH: 24", 30", 50"

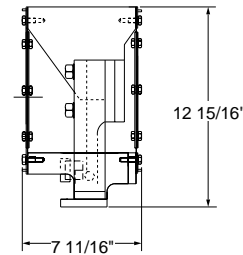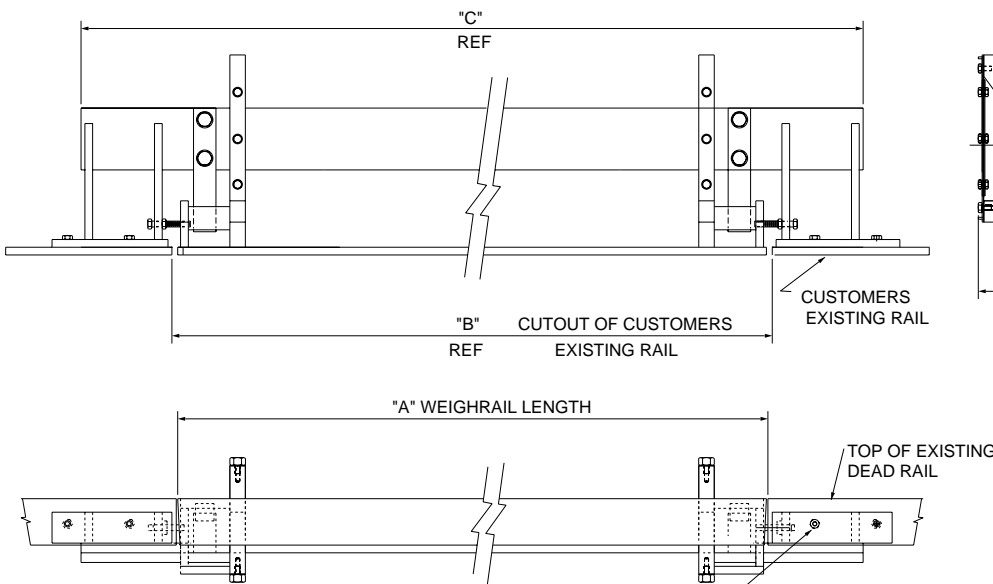

MARK & DRILL HOLES TO MATCH FRAME ASSY C' SINK OUTSIDE OF DEAD RAIL. INSTALL FRAME ASSY USING 3/8" X 1 1/2" FLAT HEAD SOCKET DRIVE SCREW.

Model No.	"A" dim	"B" dim	"C" dim	"D" dim
AB-4-CA	50"	503/16"	621/2"	661/4"
AB-4-CB	24"	243/16"	361/2"	401/4"
AB-4-CC	30"	303/16"	421/2"	461/4"



This scale meets or exceeds recommendations set forth by Handbook No. 44, issued by the US Department of Commerce, National Bureau of Standards, as a commercial weighing device.

Cardinal Scale reserves the right to improve, enhance or modify features and specifications without prior notice.

Cardinal
Cardinal Scale Manufacturing Co.
P.O. Box 151, Webb City, MO 64870 USA

Ph: 417-673-4631 or 800-441-4237 • Fax: 417-673-5001

Visit our Web site at www.cardinalscale.com

© Copyright 2004, Cardinal Scale Mfg. Co. • Printed in USA • 180B/204

Sold By:

