



DIGITAL PORTION SCALES

Models PS-7 and PS-11

NSF

MODEL PS-7

The smooth lines of the molded poly enclosure, lift-off stainless steel commodity tray, and sealed membrane keypad make cleaning the PS-7 easy.

Capacity: 7 lb x 0.1 oz, 112 oz x 0.1 oz,
112 oz x 1/8 oz, 3000 g x 1 g,
7 lb x 0.005 lb



Built-in
Rechargeable
Battery

MODEL PS-11

Enjoy the durability of the rugged PS-11 stainless steel all-purpose bench and counter top scale which can switch between five units of measurement at the push of a button.

Capacity: 11 lb x 0.1 oz, 176 oz x 0.1 oz,
176 oz x 1/4 oz, 5000 g x 2 g, 11 lb x 0.005 lb



DIGITAL PORTION SCALES



PS-11

- Easy-To-Read LCD Display
- Power-Saving "Auto-off" Feature
- IP52 Water Resistant Enclosure
- Switch Selectable Units
- NSF Certified
- Disable Different Units of Measure
- Easy-To-Clean, Removable Stainless Steel Tray

Ideal for:
Food Service Operations • Industrial Applications
Chemical Industry • Retail Establishments (food, drug)

PS-11 SPECIFICATIONS

| | |
|----------------------|--|
| Capacity | 11 lb x 0.1 oz, 176 oz x 0.1 oz, 176 oz x 1/4 oz, 5000 g x 2 g, 11 lb x 0.005 lb |
| Display | 5-digit, 0.8" x 0.3" characters with fractions LCD digital display |
| Dimensions | 7.48"W x 9.84"D x 2.17"H 190mm W x 250mm D x 55mm H |
| Platform Size | 6.89"W x 6.5"D (175mm W x 165mm D) |
| Construction | Stainless steel with stainless steel commodity tray |
| Tare | 100% of full scale capacity |
| Keys | ON/OFF, ZERO, UNITS |
| Zero | Established on power up routine and maintained by auto-zero circuitry |
| Temperature | 40° to 105° F (5° to 40° C) |
| Humidity | 25% ~95% RH |
| Power | Built-in rechargeable battery pack included (7.2 VDC/1200mA) or 115 VAC 50/60 Hz or 230 VAC 50/60 Hz powering a 15 VDC 300mA wall plug-in UL/CSA listed power supply. |
| Features | <ul style="list-style-type: none"> • Power-saving selectable timing auto shut-off which only goes to sleep when using battery operation. • Low battery indicator. • Rechargeable battery pack is able (after 8 hours of charging) to provide up to 24 hours of continuous use, making it ideal as a portable scale. |




PS-7

Ideal for:
Restaurants • Cafeterias • Deli's • Pizza Parlors
Food Service Professionals (industrial)

PS-7 SPECIFICATIONS

| | |
|----------------------|---|
| Capacity | 7 lb x 0.1 oz, 112 oz x 0.1 oz, 112 oz x 1/8 oz, 3000 g x 1 g, 7 lb x 0.005 lb |
| Display | 5-digit, 0.8" x 0.3" characters with fractions LCD digital display |
| Dimensions | 8.03"W x 7.87"D x 2.44"H 204mm W x 200mm D x 62mm H |
| Platform Size | 8.02"W x 4.96"D (204mm W x 126mm D) |
| Construction | Molded poly enclosure with stainless steel commodity tray |
| Tare | 100% of full scale capacity |
| Keys | ON/OFF, ZERO, UNITS |
| Zero | Established on power up routine and maintained by auto-zero circuitry |
| Temperature | 40° to 105° F (5° to 40° C) |
| Humidity | 25% ~95% RH |
| Power | 115 VAC 50/60 Hz or 230 VAC 50/60 Hz powering a 15 VDC 300 mA wall plug-in UL/CSA listed power supply or one (1) 9 VDC Alkaline battery (battery not included). |
| Features | <ul style="list-style-type: none"> • Power-saving selectable timing auto shut-off which only goes to sleep when using battery operation. • Low battery indicator. |

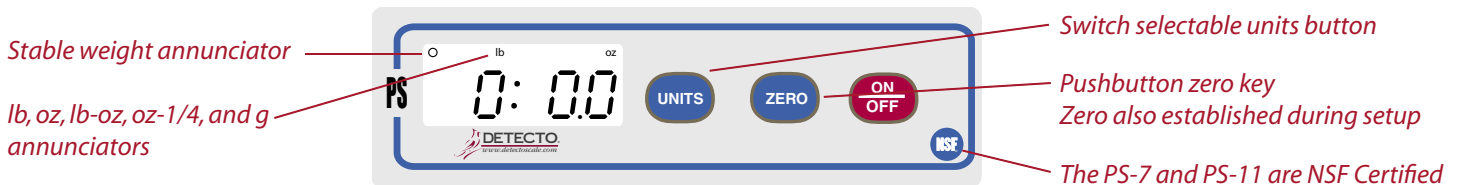

Cardinal Scale reserves the right to improve, enhance or modify features and specifications without prior notice. All registered trademarks are the property of their respective owners.

 **DETECTO**[®]
A Division of Cardinal Scale Manufacturing Co.
203 E. Daugherty, Webb City, MO 64870 USA
Ph: 417-673-4631 or 1-800-641-2008 Fax: 417-673-5001
www.detectoscale.com

SOLD BY: